

## Chapter II: Kinematics of the material point

### I-Introduction

Kinematics is a subfield of physics, developed in classical mechanics. **Kinematics** is the study of the motion of objects without reference to the forces that caused the motion.

### II- characteristics of the motion

In kinematics, the two fundamental concepts are space and time, because the motion takes place in space as a function of time. Mathematically solving kinematics problems in physics will involve understanding, calculating, and measuring several physical quantities:

- **Position vector ( $\vec{OM}$ )**: determines the object's physical location in space relative to an origin in a defined coordinate system.
- **Velocity vector ( $\vec{V}$ )**: which determines the variation in magnitude and position of the position vector.
- **Acceleration vector ( $\vec{a}$ )**: which determines the variation in magnitude and position of the velocity vector.

#### II .1- Position vector

The position of an object  $\vec{OM}$  is given by its displacement relative to O. It changes with time (Fig.1).

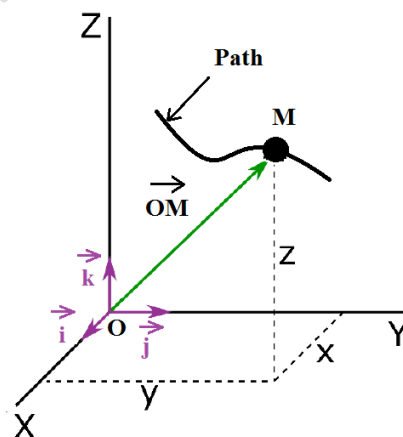


Fig.1

$\vec{i}, \vec{j}$  and  $\vec{k}$ : unit vectors.

x, y and z: point coordinates.

## II.1.1- Path of motion

The path followed by the object is the set of successive positions or line along which point P moves in space.

Parametric equation of the path: After removing time, we get the relations between the x, y, z coordinates.

## II.1.2- Displacement

The displacement is a vector quantity. It's the distance in a given direction. So, it's a vector from the starting point to the end point:

$$\Delta \vec{OM} = \vec{OM}_2 - \vec{OM}_1 = \Delta x \vec{i} + \Delta y \vec{j} + \Delta z \vec{k}$$

## II.2- Velocity vector

Velocity vector is vector quantity that characterizes the rate of change in the position of a body in space ( $[V] = \text{m/s}$ ). The direction of velocity is the same as the direction of motion.

### II.2.1- Average velocity vector

The average velocity vector  $\vec{V}$  between  $M_1$  and  $M_2$  (or between two times  $t_1$  and  $t_2$ ) is defined as the ratio of the displacement  $\Delta \vec{OM} = \vec{OM}_2 - \vec{OM}_1$  to the time interval  $\Delta t = t_2 - t_1$  (Fig. 2). That is:

$$\vec{V}_{avg} = \frac{\vec{OM}_2 - \vec{OM}_1}{t_2 - t_1} = \frac{\vec{M_1M_2}}{t_2 - t_1} = \frac{\Delta \vec{OM}}{\Delta t}$$

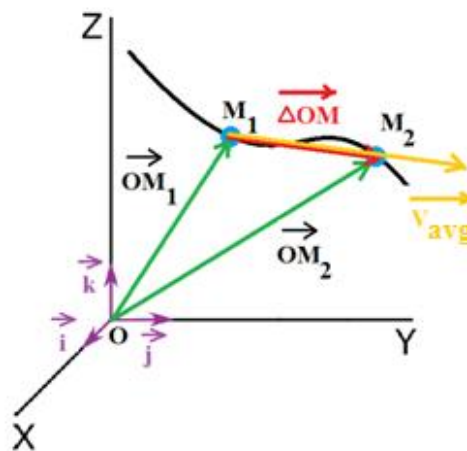


Fig.2

## II.2.2- Instantaneous velocity vector

The instantaneous velocity  $\vec{V}$  is defined as the limiting value of the ratio  $\frac{\Delta \vec{OM}}{\Delta t}$  as  $\Delta t$  approaches zero.

Mathematically,  $\vec{V}$  can be expressed as:

$$\vec{V} = \lim_{\Delta t \rightarrow 0} \frac{\Delta \vec{OM}}{\Delta t} = \frac{d\vec{OM}}{dt}$$

## II.3- Acceleration vector

The acceleration vector is vector quantity that characterizes the variation of the velocity vector with respect to time

### II.3.1- Average acceleration vector

The average acceleration  $\vec{a}_{avg}$  is defined as the ratio of the change in velocity  $\Delta \vec{V} = \vec{V}_2 - \vec{V}_1$  to the time interval  $\Delta t = t_2 - t_1$ . That is:

$$\vec{a}_{avg} = \frac{\vec{V}_2 - \vec{V}_1}{t_2 - t_1} = \frac{\Delta \vec{V}}{\Delta t}$$

### II.3.2- Instantaneous acceleration vector

Instantaneous acceleration is defined as the limiting value of the ratio  $\frac{\Delta \vec{V}}{\Delta t}$  when  $\Delta t$  approaches zero.

It is defined as follows:

$$\vec{a} = \lim_{\Delta t \rightarrow 0} \frac{\Delta \vec{V}}{\Delta t} = \frac{d\vec{V}}{dt} = \frac{d^2 \vec{OM}}{dt^2}$$

#### Note

1- Depending on the shape of the path, the motion is classified:


- Linear when the path is straight line"
- Curvilinear when the path isn't straight line.

2- If the motion is unidirectional (one direction), for example in the direction of the axis (OX), the velocity can be expressed as follow:

$$V_{avg} = \frac{x_2 - x_1}{t_2 - t_1} = \frac{\Delta x}{\Delta t}$$

Note that the velocity is a vector quantity.

Ex:



$$V_{t_1, t_3} = \frac{x_3 - x_1}{t_3 - t_1} > 0$$

$$V_{t_3, t_4} = \frac{x_4 - x_3}{t_4 - t_3} < 0$$

$$V_{t_1, t_5} = \frac{x_5 - x_1}{t_5 - t_1} = 0 \quad (x_5 = x_1)$$

Or, the average speed  $S_{avg}$  is:

$$S_{avg} = \frac{\text{traveled distance}}{\Delta t} \Rightarrow S_{avg}(t_1, t_5) = \frac{d_1 + d_2 + d_3 + d_4}{t_5 - t_1}$$

So, the speed is the distance traveled per unit time (the speed is positive scalar quantity).

### III- Motions in various coordinate systems and bases

In mechanics, before studying the motion of a system, it is necessary to indicate the coordinate system in which the motion will be describe. We will explain the motion in different coordinate systems and bases, i.e. the set of three vectors on which we will give the expressions of the position vector, velocity vector and acceleration vector. The elementary surface area and volume will also be given.

#### III.1- Cartesian coordinate system

The Cartesian coordinates system is orthonormal and it consists of three axes (OX, OY, OZ). The directions of (OX, OY, OZ) are determined by three unit vectors  $(\vec{i}, \vec{j}, \vec{k})$  which are fixed in the observation frame of reference (neither the norm, nor the support, nor the direction of these vectors change with time).

Each point M is marked by its coordinates (x, y, z) in the base  $(\vec{i}, \vec{j}, \vec{k})$ .

The position vector is defined by the origin point O and the coordinates (x,y,z):

$$\vec{OM} = x\vec{i} + y\vec{j} + z\vec{k}$$

$$\vec{OM} \begin{pmatrix} x \\ y \\ z \end{pmatrix}$$

$$\|\vec{OM}\| = OM = \sqrt{x^2 + y^2 + z^2}$$

$$\overrightarrow{OM} = \|\overrightarrow{OM}\| \vec{u}$$

$\vec{u}$  is the unit vector:  $\vec{u} = \frac{\overrightarrow{OM}}{\|\overrightarrow{OM}\|}$

- The elementary displacement of M:  $d\overrightarrow{OM} = dx \vec{i} + dy \vec{j} + dz \vec{k}$
- The elementary surface:  $ds = dx dy$  (or:  $ds = dy dz$ , or:  $ds = dz dx$ ).
- The elementary volume  $dv = dx dy dz$ .

The velocity vector:  $\vec{V} = \frac{d\overrightarrow{OM}}{dt} = \frac{dx}{dt} \vec{i} + \frac{dy}{dt} \vec{j} + \frac{dz}{dt} \vec{k} = \dot{x} \vec{i} + \dot{y} \vec{j} + \dot{z} \vec{k}$

$$\|\vec{V}\| = V = \left( \dot{x}^2 + \dot{y}^2 + \dot{z}^2 \right)$$

- The acceleration vector:  $\vec{a} = \frac{d^2\overrightarrow{OM}}{dt^2} = \frac{d^2x}{dt^2} \vec{i} + \frac{d^2y}{dt^2} \vec{j} + \frac{d^2z}{dt^2} \vec{k} = \ddot{x} \vec{i} + \ddot{y} \vec{j} + \ddot{z} \vec{k}$

$$\|\vec{a}\| = a = \left( \ddot{x}^2 + \ddot{y}^2 + \ddot{z}^2 \right)$$

### III.2- Polar coordinates system

The polar reference frame is orthonormal. It consists of two unit vectors ( $\vec{u}_\rho, \vec{u}_\theta$ ) which move with time.

Each point M is identified by its coordinates  $(\rho, \theta)$  in the base  $(\vec{u}_\rho, \vec{u}_\theta)$  (Fig. 3).

$\theta$  is the angle between  $\overrightarrow{OM}$  and  $\vec{i}$ .

$\vec{u}_\theta$  is perpendicular to  $\vec{u}_\rho$ .

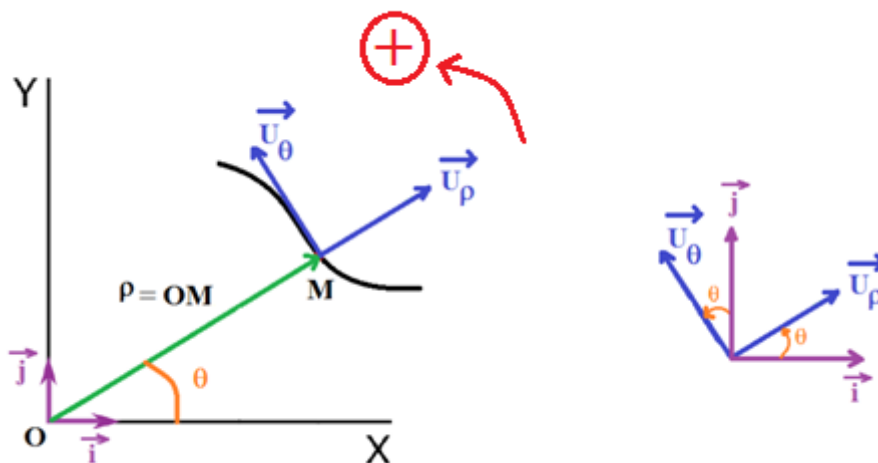


Fig.3

Each point M is identified by its coordinates  $(\rho, \theta)$  in the base  $(\vec{u}_\rho, \vec{u}_\theta)$  :

$$\vec{OM} = \rho \vec{u}_\rho$$

$$\vec{OM} \begin{pmatrix} \rho \\ \theta \end{pmatrix}$$

$$\|\vec{OM}\| = OM = \rho$$

In the Cartesian reference frame:  $\vec{OM} = x\vec{i} + y\vec{j}$

So we have:

$$\begin{cases} x = \rho \cos \theta \\ y = \rho \sin \theta \end{cases}$$

$$\text{tg} \theta = \frac{y}{x}, \quad \rho = \sqrt{x^2 + y^2}$$

$$\vec{u}_\rho = \cos \theta \vec{i} + \sin \theta \vec{j}$$

$$\vec{u}_\theta = -\sin \theta \vec{i} + \cos \theta \vec{j}$$

Noted that:  $\vec{u}_\theta = \frac{d\vec{u}_\rho}{d\theta}$

- The elementary displacement of M:  $d\vec{M} = d\rho \vec{u}_\rho + \rho d\theta \vec{u}_\theta$

- The elementary surface:  $ds = \rho d\rho d\theta$

The velocity vector:  $\vec{V} = \frac{d\vec{OM}}{dt} = \frac{d(\rho \vec{u}_\rho)}{dt} = \frac{d\rho}{dt} \vec{u}_\rho + \rho \frac{d\theta}{dt} \vec{u}_\theta \Rightarrow \vec{V} = \dot{\rho} \vec{u}_\rho + \rho \dot{\theta} \vec{u}_\theta$

$$\|\vec{V}\| = V = \sqrt{\dot{\rho}^2 + (\rho \dot{\theta})^2}$$

The acceleration vector:  $\vec{a} = \frac{d\vec{V}}{dt} = \frac{d(\dot{\rho} \vec{u}_\rho + \rho \dot{\theta} \vec{u}_\theta)}{dt}$

$$\vec{a} = \frac{d\dot{\rho}}{dt} \vec{u}_\rho + \dot{\rho} \frac{d\vec{u}_\rho}{dt} + \left(\frac{d\rho}{dt}\right) \dot{\theta} \vec{u}_\theta + \rho \frac{d\dot{\theta}}{dt} \vec{u}_\theta + \rho \dot{\theta} \frac{d\vec{u}_\theta}{dt}$$

$$\vec{a} = \ddot{\rho} \vec{u}_\rho + \dot{\rho} \dot{\theta} \vec{u}_\theta + \dot{\rho} \dot{\theta} \vec{u}_\theta + \rho \ddot{\theta} \vec{u}_\theta - \rho \dot{\theta}^2 \vec{u}_\rho$$

$$\vec{a} = (\ddot{\rho} - \rho \dot{\theta}^2) \vec{u}_\rho + (2\dot{\rho} \dot{\theta} + \rho \ddot{\theta}) \vec{u}_\theta$$

$$\|\vec{a}\| = a = \left( \sqrt{(\ddot{\rho} - \rho \dot{\theta}^2)^2 + (2\dot{\rho} \dot{\theta} + \rho \ddot{\theta})^2} \right)$$

### III.3- Cylindrical coordinates system

The cylindrical reference frame is orthonormal. It consists of three unit vectors  $(\vec{u}_\rho, \vec{u}_\theta, \vec{k})$  which the two vectors  $(\vec{u}_\rho, \vec{u}_\theta)$  varies with time while  $\vec{k}$  is invariable (Fig.4).

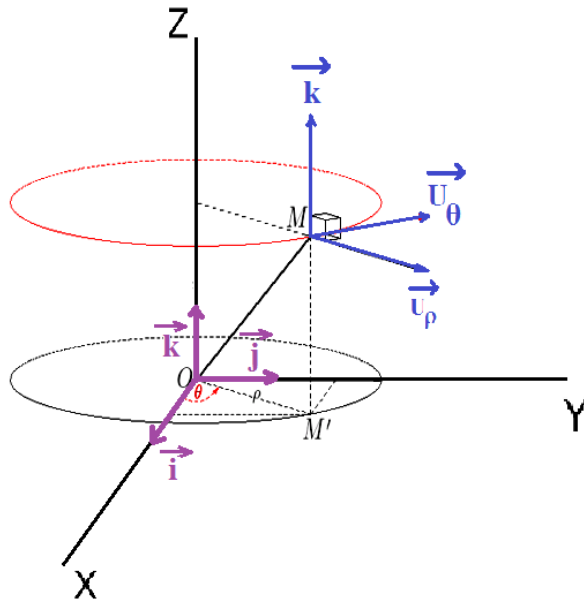


Fig.4

Each point M is identified by its coordinates  $(\rho, \theta, z)$  in the base  $(\vec{u}_\rho, \vec{u}_\theta, \vec{k})$  (Fig. 4).

$\theta$  is the angle between  $\vec{OM}'$  and  $\vec{i}$ ,  $M'$  is the projection of M in the plane (xoy).

The position vector is defined from the origin point O and the coordinates  $(\rho, \theta, z)$ :

$$\vec{OM} = \vec{OM}' + \vec{M'M} \Rightarrow \vec{OM} = \rho \vec{u}_\rho + z \vec{k}$$

$$\vec{OM} \begin{pmatrix} \rho \\ \theta \\ z \end{pmatrix}$$

$$\|\vec{OM}\| = OM = \sqrt{\rho^2 + z^2}$$

In the Cartesian reference frame:  $\vec{OM} = x\vec{i} + y\vec{j} + z\vec{k}$

So we have :

$$\begin{cases} x = \rho \cos \theta \\ y = \rho \sin \theta \\ z = z \end{cases}$$

$$OM = \sqrt{\rho^2 + z^2} \quad , \quad \rho = \sqrt{x^2 + y^2} \quad , \quad \text{tg} \theta = \frac{y}{x}$$

- The elementary displacement of M:  $d\vec{OM} = d\rho \vec{u}_\rho + \rho d\theta \vec{u}_\theta + dz \vec{k}$

- The elementary surface:  $ds = \rho d\theta dz$
- The elementary volume:  $dv = \rho d\rho d\theta dz$

The velocity vector :  $\vec{V} = \frac{d\vec{OM}}{dt} = \frac{d(\rho\vec{u}_\rho + z\vec{k})}{dt} = \frac{d\rho}{dt}\vec{u}_\rho + \rho\frac{d\theta}{dt}\vec{u}_\theta + \dot{z}\vec{k} \Rightarrow \vec{V} = \dot{\rho}\vec{u}_\rho + \rho\dot{\theta}\vec{u}_\theta + \dot{z}\vec{k}$

$$\|\vec{V}\| = v = \left( \sqrt{\dot{\rho}^2 + (\rho\dot{\theta})^2 + \dot{z}^2} \right)$$

- The acceleration vector:  $\vec{a} = \frac{d\vec{V}}{dt} = \frac{d(\dot{\rho}\vec{u}_\rho + \rho\dot{\theta}\vec{u}_\theta + \dot{z}\vec{k})}{dt}$

$$\vec{a} = \frac{d\dot{\rho}}{dt}\vec{u}_\rho + \dot{\rho}\frac{d\vec{u}_\rho}{dt} + \left(\frac{d\rho}{dt}\right)\dot{\theta}\vec{u}_\theta + \rho\frac{d\dot{\theta}}{dt}\vec{u}_\theta + \rho\dot{\theta}\frac{d\vec{u}_\theta}{dt} + \frac{d\dot{z}}{dt}\vec{k}$$

$$\vec{a} = \ddot{\rho}\vec{u}_\rho + \dot{\rho}\dot{\theta}\vec{u}_\theta + \dot{\rho}\dot{\theta}\vec{u}_\theta + \rho\ddot{\theta}\vec{u}_\theta - \rho\dot{\theta}^2\vec{u}_\rho + \ddot{z}\vec{k}$$


$$\vec{a} = (\ddot{\rho} - \rho\dot{\theta}^2)\vec{u}_\rho + (2\dot{\rho}\dot{\theta} + \rho\ddot{\theta})\vec{u}_\theta + \ddot{z}\vec{k}$$

$$\|\vec{a}\| = a = \sqrt{(\ddot{\rho} - \rho\dot{\theta}^2)^2 + (2\dot{\rho}\dot{\theta} + \rho\ddot{\theta})^2 + \ddot{z}^2}$$

### III.4- Spherical coordinates system

The spherical reference frame is orthonormal. It consists of three unit vectors ( $\vec{u}_r, \vec{u}_\theta, \vec{u}_\phi$ ) which vary with time.

Each point M is identified by its coordinates (r,  $\theta$ ,  $\Phi$ ) in the base ( $\vec{u}_r, \vec{u}_\theta, \vec{u}_\phi$ ) (Fig. 5).

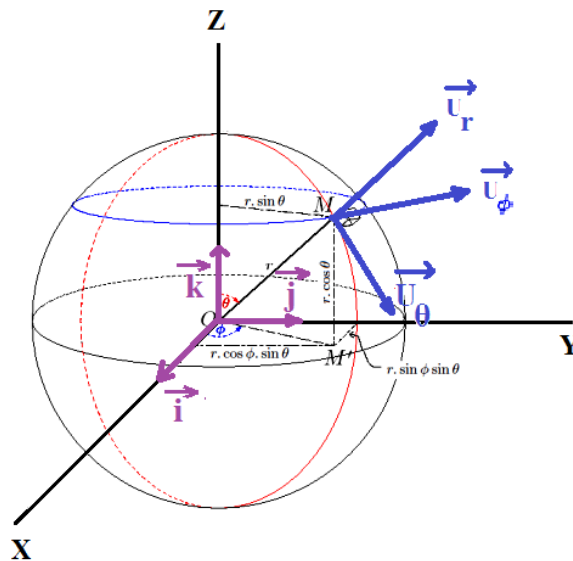

$$\theta = (\widehat{oZ, oM}) = [0, \pi], \quad \Phi = (\widehat{oX, oM'}) = [0, 2\pi]$$

Fig.5



The position vector is defined from the origin point O and the coordinates (r,  $\theta$ ,  $\Phi$ ):

$$\overrightarrow{OM} = r\vec{u}_r$$

$$\overrightarrow{OM} \left( \begin{matrix} r \\ \theta \\ \Phi \end{matrix} \right), \quad (0 \leq \Phi \leq 2\pi) \text{ and } (0 \leq \theta \leq \pi)$$

$$\|\overrightarrow{OM}\| = OM = r$$

$$\overrightarrow{OM} = \overrightarrow{OM'} + \overrightarrow{M'M}$$

$$\overrightarrow{OM'} = r'(\cos\Phi\vec{i} + \sin\Phi\vec{j})$$

$$r' = r \sin \theta$$

$$\overrightarrow{OM'} = r \sin \theta (\cos\Phi\vec{i} + \sin\Phi\vec{j}) = r \sin \theta \cos\Phi\vec{i} + r \sin \theta \sin\Phi\vec{j}$$

$$\overrightarrow{M'M} = r \cos \theta \vec{k}$$

So : 
$$\overrightarrow{OM} = r \sin \theta \cos\Phi\vec{i} + r \sin \theta \sin\Phi\vec{j} + r \cos \theta \vec{k}$$

In the Cartesian reference frame:  $\overrightarrow{OM} = x\vec{i} + y\vec{j} + z\vec{k}$



We deduce that:

$$\begin{cases} x = r \sin \theta \cos \Phi \\ y = r \sin \theta \sin \Phi \\ z = r \cos \theta \end{cases}$$

$$\overrightarrow{OM} = r \sin \theta \cos\Phi\vec{i} + r \sin \theta \sin\Phi\vec{j} + r \cos \theta \vec{k} = r(\sin \theta \cos\Phi\vec{i} + \sin \theta \sin\Phi\vec{j} + \cos \theta \vec{k}) = r\vec{u}_r$$

$$\Rightarrow \overrightarrow{OM} = r \vec{u}_r$$

$$r = \sqrt{x^2 + y^2 + z^2}, \quad \rho = \sqrt{x^2 + y^2}, \quad \operatorname{tg}\Phi = \frac{y}{x}, \quad \operatorname{tg}\theta = \frac{\rho}{z} = \frac{\sqrt{x^2 + y^2}}{z}$$

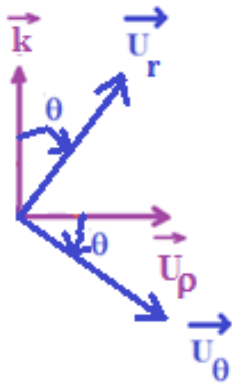

$$\vec{u}_\rho = \cos\Phi \vec{i} + \sin\Phi \vec{j}$$

$$\vec{u}_\phi = -\sin\Phi \vec{i} + \cos\Phi \vec{j}$$

$$\vec{u}_\theta = \cos\theta \vec{u}_\rho - \sin\theta \vec{k} \Rightarrow \vec{u}_\theta = \cos\theta \cos\Phi \vec{i} + \cos\theta \sin\Phi \vec{j} - \sin\theta \vec{k}$$

$$\vec{u}_r = \sin\theta \vec{u}_\rho + \cos\theta \vec{k} \Rightarrow \vec{u}_r = \sin\theta \cos\Phi \vec{i} + \sin\theta \sin\Phi \vec{j} + \cos\theta \vec{k}$$

$\vec{u}_r$  is the radial unit vector.

$$\frac{\partial \vec{u}_r}{\partial \theta} = \vec{u}_\theta = \cos\theta \cos\Phi \vec{i} + \cos\theta \sin\Phi \vec{j} - \sin\theta \vec{k}$$

$\vec{u}_\theta$  is the ortho-radial vector.

$$\vec{u}_\phi = \frac{1}{\cos\theta} \frac{\partial \vec{u}_\theta}{\partial \Phi} = \frac{1}{\sin\theta} \frac{\partial \vec{u}_r}{\partial \Phi} = -\sin\Phi \vec{i} + \cos\Phi \vec{j}$$

- The elementary displacement of M:  $d\vec{OM} = dr\vec{u}_r + r d\vec{u}_r = dr\vec{u}_r + r\left(\frac{\partial \vec{u}_r}{\partial \theta} d\theta + \frac{\partial \vec{u}_r}{\partial \Phi} d\Phi\right)$

$$d\vec{OM} = dr\vec{u}_r + r(d\theta \vec{u}_\theta + \sin\theta d\Phi \vec{u}_\phi)$$

- The elementary surface:  $dS = r^2 \sin\theta d\theta d\Phi$

- The elementary volume  $dV = r^2 dr \sin\theta d\theta d\Phi$ .

- The velocity vector:  $\vec{V} = \frac{d\vec{OM}}{dt} = \frac{d(r\vec{u}_r)}{dt} = \frac{dr}{dt} \vec{u}_r + r \frac{d\vec{u}_r}{dt} = \frac{dr}{dt} \vec{u}_r + r\left(\frac{\partial \vec{u}_r}{\partial \theta} \frac{d\theta}{dt} + \frac{\partial \vec{u}_r}{\partial \Phi} \frac{d\Phi}{dt}\right)$

$$\vec{V} = \dot{r}\vec{u}_r + r(\dot{\theta}\vec{u}_\theta + \dot{\Phi}\sin\theta\vec{u}_\phi)$$

$$\|\vec{V}\| = V = \sqrt{\dot{r}^2 + r^2\dot{\theta}^2 + r^2\dot{\Phi}^2(\sin\theta)^2}$$

- The acceleration vector:  $\vec{a} = \frac{d\vec{V}}{dt} = \frac{d}{dt}\left(\dot{r}\vec{u}_r + r(\dot{\theta}\vec{u}_\theta + \dot{\Phi}\sin\theta\vec{u}_\phi)\right)$

$$\vec{a} = \begin{cases} a_r = \ddot{r} - r\dot{\Phi}^2(\sin\theta)^2 - r\dot{\theta}^2 \\ a_\theta = 2\dot{r}\dot{\theta} + r\ddot{\theta} - r\dot{\Phi}^2\sin\theta\cos\theta \\ a_\phi = 2\dot{r}\dot{\Phi}\sin\theta + r\ddot{\Phi}\sin\theta + 2r\dot{\theta}\dot{\Phi}\cos\theta \end{cases}$$

$$\|\vec{a}\| = a = \sqrt{a_r^2 + a_\theta^2 + a_\phi^2}$$

### III.5- Intrinsic coordinate system (Frenet system)

The intrinsic coordinate system for each point of the trajectory is defined as a system of reference formed by *two axes* ( $\vec{u}_T, \vec{u}_N$ ) (Fig.6):

- **Tangent axis:** its direction is *tangent* to the trajectory and is positive in the same direction than the velocity at that point. It is defined by the unit vector  $\vec{u}_T$
- **Normal axis:** it is *perpendicular* to the trajectory and is positive toward the center of curvature of the trajectory. It is defined by the unit vector  $\vec{u}_N$

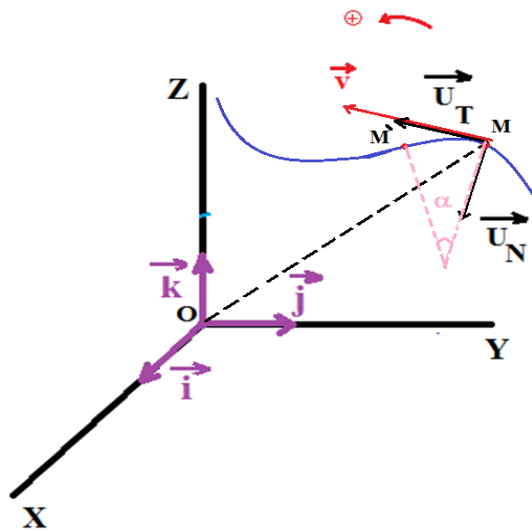


Fig.6

#### - Curvilinear abscissa

In this frame of reference, we define the curvilinear abscissa  $S$  of the point M along the trajectory as being equal to the length of the arc  $\widehat{MM'}$ . Noting that:

$$\vec{u}_N = \frac{d\vec{u}_T}{ds}, \quad \mathfrak{R} \text{ is the radius of curvature.}$$

$$\text{The velocity vector: } \vec{V} = V \vec{u}_T, \quad V = \frac{ds}{dt}$$

The acceleration vector:

$$\vec{a} = \frac{d\vec{V}}{dt} = \frac{d(V \vec{u}_T)}{dt} = \frac{dV}{dt} \vec{u}_T + V \frac{d\vec{u}_T}{dt}$$

$$\frac{d\vec{u}_T}{dt} = \frac{d\vec{u}_T}{d\alpha} \frac{d\alpha}{dt} = \vec{u}_N \frac{d\alpha}{dt}$$

$$d\vec{u}_T = \vec{u}_N d\alpha$$

$$dS = \mathfrak{R} d\alpha$$

$$d\vec{u}_T = \vec{u}_N \frac{dS}{\mathfrak{R}}$$

$$\vec{u}_N = \mathfrak{R} \frac{d\vec{u}_T}{dS}$$

$$\frac{d\vec{u}_T}{dt} = \frac{d\vec{u}_T}{dS} \frac{dS}{dt}$$

$$\frac{d\vec{u}_T}{dt} = \frac{d\vec{u}_T}{dS} V$$

$$\frac{d\vec{u}_T}{dt} = \frac{V}{\mathfrak{R}} \vec{u}_N$$

$$\vec{a} = \frac{dV}{dt} \vec{u}_T + V \frac{d\vec{u}_T}{dt}$$

$$\vec{a} = \frac{dV}{dt} \vec{u}_T + V \frac{V}{\mathfrak{R}} \vec{u}_N$$

$$\vec{a} = \frac{dV}{dt} \vec{u}_T + \frac{V^2}{\mathfrak{R}} \vec{u}_N$$

$$\vec{a} = a_T \vec{u}_T + a_N \vec{u}_N$$

$$\begin{cases} a_T = \frac{dV}{dt} ; \text{ tangential acceleration} \\ a_N = \frac{V^2}{\mathfrak{R}} ; \text{ normal acceleration} \end{cases}$$

$$\|\vec{a}\| = a = \sqrt{a_T^2 + a_N^2}$$

## IV- Study of motions

### IV.1- Rectilinear motion

A rectilinear (Linear) motion is one-dimensional motion along a straight line. It can be described mathematically using only one spatial dimension.

#### IV.1.1- Uniform rectilinear motion

It is characterized by constant velocity (zero acceleration) :  $\mathbf{a} = \mathbf{0}$  and  $\mathbf{V} = \mathbf{V}_0 = \mathbf{C}^{te}$

$$V = V_0 = \frac{dx}{dt} \Rightarrow dx = V_0 dt \Rightarrow \int_{x_0}^x dx = \int_0^t V_0 dt \Rightarrow x - x_0 = V_0 t$$

$$\Rightarrow \mathbf{x} = \mathbf{x}_0 + \mathbf{V}_0 t$$

If  $\mathbf{V}_0 = \mathbf{0}$ , the object is stationary.

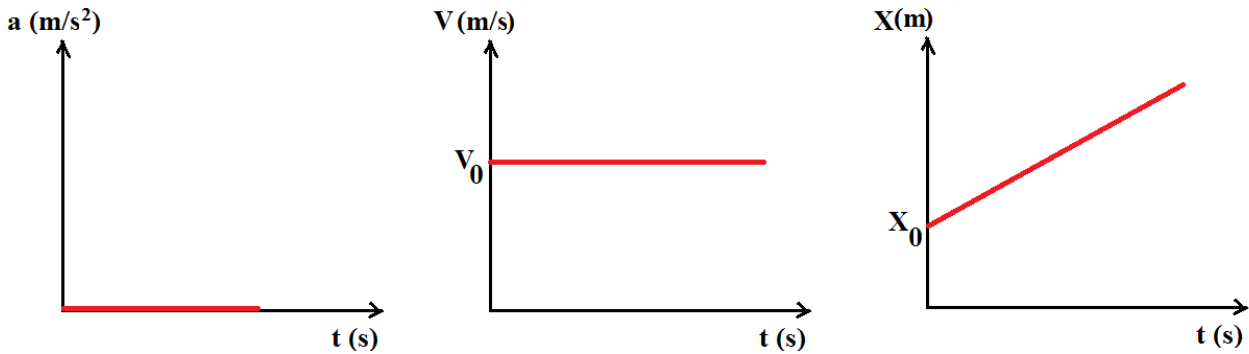


Fig.7

#### IV.1.2- Non-uniform linear motion

It can be uniformly accelerated (or retarded) rectilinear motion. It is characterised by variable velocity (non-zero acceleration).

$$\mathbf{a} = \mathbf{a}_0 = \frac{d\mathbf{v}}{dt} \Rightarrow d\mathbf{V} = \mathbf{a}_0 dt \Rightarrow \int_{V_0}^V dV = \int_0^t \mathbf{a}_0 dt \Rightarrow \mathbf{V} - \mathbf{V}_0 = \mathbf{a}_0 t$$

$$\Rightarrow \mathbf{V} = \mathbf{V}_0 + \mathbf{a}_0 t$$

$$\mathbf{V} = \frac{dx}{dt} \Rightarrow dx = \mathbf{V} dt \Rightarrow \int_{x_0}^x dx = \int_0^t (V_0 + \mathbf{a}_0 t) dt \Rightarrow x - x_0 = V_0 t + \frac{1}{2} \mathbf{a}_0 t^2$$

$$\mathbf{x} = \frac{1}{2} \mathbf{a}_0 t^2 + \mathbf{V}_0 t + \mathbf{x}_0 \text{ (equation of a parabola)}$$

- If acceleration and velocity are in the same direction ( $\vec{V} \cdot \vec{a} > 0$ ) the movement is **accelerated**.

- If acceleration and speed are in opposite directions ( $\vec{V} \cdot \vec{a} < 0$ ), the movement is **retarded**.

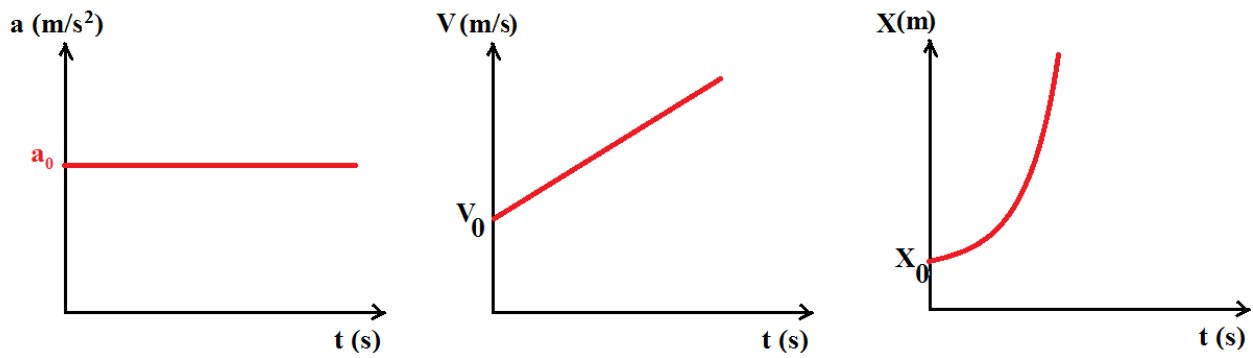


Fig.8

#### IV.1.2-Projectile (2 dimensions)

Any object that is thrown into the air is called a *projectile*.

Let us assume that at  $t = 0$  the projectile leaves the origin (i.e.  $x_0 = y_0 = 0$ ) with initial velocity  $\vec{V}_0$  that makes an angle  $\theta_0$  with the positive  $x$  direction as in Fig. 9

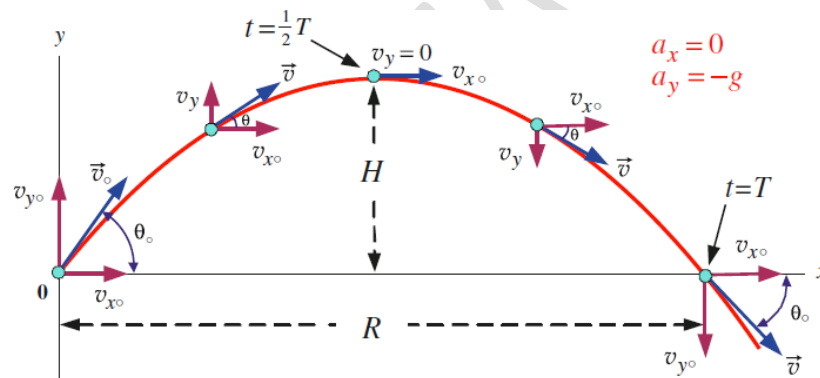


Fig.9

$$a_x = 0 \text{ and } a_y = -g$$

$$\vec{V}_0 = V_{x_0} \vec{i} + V_{y_0} \vec{j} \quad , \quad V_{x_0} = V_0 \cos \theta_0 \quad , \quad V_{y_0} = V_0 \sin \theta_0$$

We decompose the horizontal motion and vertical motion as described below:

$$a_x = 0 \Rightarrow V_x = V_{x_0} = V_0 \cos \theta_0 \Rightarrow x = V_{x_0} t \Rightarrow x = (V_0 \cos \theta_0) t$$

$$a_y = -g \Rightarrow V_y = V_{y_0} - g t \Rightarrow V_y = V_0 \sin \theta_0 - g t \Rightarrow y = (V_0 \sin \theta_0) t - \frac{1}{2} g t^2$$

- Calculus of the horizontal range  $R$  (the distance traveled by the projectile when it returns to  $y=0$ ) after time  $t = T$

Set  $x = R$  at time  $t = T$  and  $y = 0$

$$R = (V_0 \cos \theta_0) T$$

$$y = (V_0 \sin \theta_0) T - \frac{1}{2} g T^2 = 0$$

$$\Rightarrow T = \frac{2 V_0 \sin \theta_0}{g}$$

$$R = (V_0 \cos \theta_0) T \Rightarrow R = (V_0 \cos \theta_0) \frac{2 V_0 \sin \theta_0}{g}, \quad 2 \sin \theta_0 \cos \theta_0 = \sin 2 \theta_0$$

$$R = \frac{V_0^2 \sin 2 \theta_0}{g}$$

- Calculus of maximum height H:

we set  $V_y = 0$

$$V_y = V_0 \sin \theta_0 - g t = 0 \Rightarrow t = \frac{V_0 \sin \theta_0}{g}$$

$$\Rightarrow H = (V_0 \sin \theta_0) \frac{V_0 \sin \theta_0}{g} - \frac{1}{2} g \left( \frac{V_0 \sin \theta_0}{g} \right)^2$$

$$H = \frac{V_0^2 \sin^2 \theta_0}{2g}$$

- Equation of the Trajectory:

$$x = (V_0 \cos \theta_0) t \Rightarrow t = \frac{x}{V_0 \cos \theta_0}$$

$$y = (V_0 \sin \theta_0) \left( \frac{x}{V_0 \cos \theta_0} \right) - \frac{1}{2} g \left( \frac{x}{V_0 \cos \theta_0} \right)^2 \Rightarrow y = - \left( \frac{g}{2 V_0^2 \cos^2 \theta_0} \right) x^2 + ( \tan \theta_0 ) x$$

This can be written in the form  $y = ax^2 + bx$ , which is the equation of a *parabola* that passes through the origin.

## IV.2- Curvilinear movement

### IV.2.1- Circular movement

In this case, the trajectory is not a straight line, but a circle of radius R (R is constant) (Fig.10).

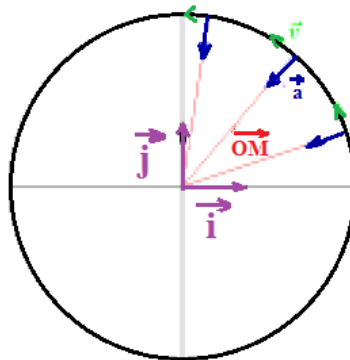


Fig. 10

Using polar coordinates:  $\overline{OM} = \rho \vec{u}_\rho = R \vec{u}_\rho$

The velocity vector  $\vec{V} = \frac{d\overline{OM}}{dt} = \frac{d(R\vec{u}_\rho)}{dt} = \frac{dR}{dt} \vec{u}_\rho + R \frac{d\theta}{dt} \vec{u}_\theta$

$$\vec{V} = R\dot{\theta} \vec{u}_\theta$$

$$\|\vec{V}\| = V = R\dot{\theta} = R\omega \quad (\dot{\theta} = \omega \text{ the angular velocity})$$

The acceleration vector:  $\vec{a} = \frac{d\vec{V}}{dt} = \frac{d(R\dot{\theta} \vec{u}_\theta)}{dt}$

$$= R \frac{d\dot{\theta}}{dt} \vec{u}_\theta + R\dot{\theta} \frac{d\vec{u}_\theta}{dt}$$

$$\vec{a} = R\ddot{\theta} \vec{u}_\theta - R\dot{\theta}^2 \vec{u}_\rho$$

$$\vec{a} = R(-\dot{\theta}^2 \vec{u}_\rho + \ddot{\theta} \vec{u}_\theta)$$

$$\vec{a} = R(-\dot{\theta}^2 \vec{u}_\rho + \alpha \vec{u}_\theta) \quad (\ddot{\theta} = \alpha \text{ angular acceleration})$$

$$\|\vec{a}\| = a = R\sqrt{(\dot{\theta}^2)^2 + (\alpha)^2}$$

- Using intrinsic coordinates

$$\vec{u}_\rho = -\vec{u}_N, \quad \vec{u}_\theta = \vec{u}_T$$

$$\vec{V} = R\dot{\theta} \vec{u}_T$$

The acceleration vector:  $\vec{a} = R(\dot{\theta}^2 \vec{u}_N + \ddot{\theta} \vec{u}_T)$

$$\begin{cases} a_T = \frac{dV}{dt} = R\ddot{\theta} \\ a_N = \frac{V^2}{\mathfrak{R}} = R\dot{\theta}^2 \end{cases}$$

$$\frac{V^2}{\mathfrak{R}} = R\dot{\theta}^2 \Rightarrow \frac{(R\dot{\theta})^2}{\mathfrak{R}} = R\dot{\theta}^2 \Rightarrow \mathfrak{R} = R \quad (\text{radius of curvature} = \text{radius of the circle})$$

The curvilinear abscissa:

$$V = \frac{ds}{dt} = R \frac{d\theta}{dt} \Rightarrow ds = R d\theta \Rightarrow \int_{s_0}^s ds = \int_{\theta_0}^{\theta} R d\theta \Rightarrow S - S_0 = R(\theta - \theta_0)$$

$$\Rightarrow S = R(\theta - \theta_0) + S_0$$



### IV.2.1.1- Uniform circular motion

$$\dot{\theta} = \omega_0 = C^{te}, \ddot{\theta} = 0$$

$$\dot{\theta} = \frac{d\theta}{dt} = \omega_0 \Rightarrow \int_{\theta_0}^{\theta} d\theta = \int_0^t \omega_0 dt \Rightarrow \theta - \theta_0 = \omega_0 t$$

$$\Rightarrow \theta = \omega_0 t + \theta_0$$

In polar coordinates :  $\vec{V} = R\omega_0 \vec{u}_\theta$

$$\vec{a} = R(-\dot{\theta}^2 \vec{u}_\rho + \ddot{\theta} \vec{u}_\theta) = -R\omega_0^2 \vec{u}_\rho$$

In intrinsic coordinates:  $\vec{V} = R\omega_0 \vec{u}_T$

$$\vec{a} = R\omega_0^2 \vec{u}_N$$

The curvilinear abscissa:  $s = R(\theta - \theta_0) + s_0 = R(\omega_0 t) + s_0$

### IV.2.1.2- Accelerated uniform circular motion

$$\ddot{\theta} = \alpha_0 = \dot{\omega} = C^{te} \Rightarrow \frac{d\omega}{dt} = \alpha_0 \Rightarrow \int_{\omega_0}^{\omega} d\omega = \int_0^t \alpha_0 dt \Rightarrow \omega - \omega_0 = \alpha_0 t$$

$$\Rightarrow \omega = \alpha_0 t + \omega_0$$

$$\omega = \frac{d\theta}{dt} \Rightarrow \int_{\theta_0}^{\theta} d\theta = \int_0^t \omega dt \Rightarrow \int_{\theta_0}^{\theta} d\theta = \int_0^t (\alpha_0 t + \omega_0) dt$$

$$\Rightarrow \theta - \theta_0 = \frac{1}{2} \alpha_0 t^2 + \omega_0 t \Rightarrow \theta = \frac{1}{2} \alpha_0 t^2 + \omega_0 t + \theta_0$$

$$\vec{V} = R\dot{\theta} \vec{u}_T = R\omega \vec{u}_T \Rightarrow \vec{V} = R(\alpha_0 t + \omega_0) \vec{u}_T$$

$$\left\{ \begin{array}{l} a_T = \frac{dV}{dt} = R\alpha_0 \\ a_N = \frac{V^2}{R} = \frac{V^2}{R} = R(\alpha_0 t + \omega_0)^2 \end{array} \right.$$

$$S = R(\theta - \theta_0) + S_0 \Rightarrow S = R\left(\frac{1}{2} \alpha_0 t^2 + \omega_0 t\right) + S_0$$

### IV.2.1.3- Angular rotation velocity vector

Let the plane of motion be the (xoy) plane and (oz) the axis of rotation.

The angular velocity vector of rotation, or simply vector rotation is  $\vec{\omega}$  :

$$\vec{\omega} = \omega \vec{k}$$

$$\vec{V} = R\omega \vec{u}_\theta = R\omega (\vec{k} \wedge \vec{u}_\rho) = \omega \vec{k} \wedge R\vec{u}_\rho$$

$$\vec{OM} = R\vec{u}_\rho \quad \Rightarrow \quad \vec{V} = \vec{\omega} \wedge \vec{OM} \Rightarrow \quad \frac{d\vec{OM}}{dt} = \vec{\omega} \wedge \vec{OM}$$

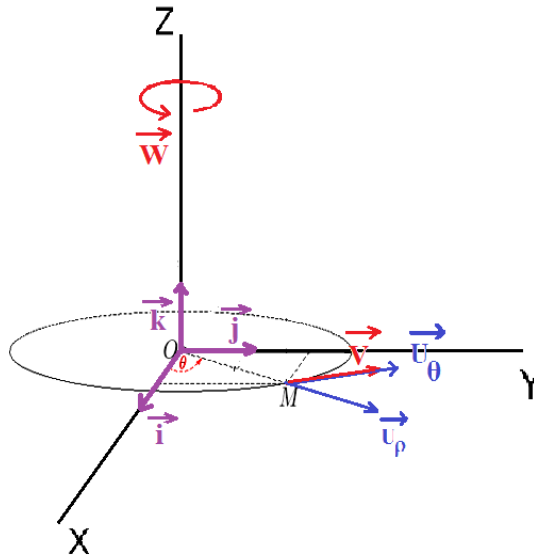


Fig.11

### IV.3- Harmonic motion (rectilinear sinusoidal)

The motion of a solid is said to be rectilinear and sinusoidal if its time law is written in the form:

$$x(t) = x_m \sin(\omega t + \varphi_0)$$

$x$ : is also called the elongation of the solid at time  $t$  (m).

$x_m$  : is the amplitude of the movement (m).

$\Phi = (\omega t + \varphi_0)$  is the phase at time  $t$  (rad).

$\varphi_0$  : initial phase, at  $t = 0$  (rad).

$\omega$ : is the pulsation of the movement ( $\text{rad.s}^{-1}$ ).

Rectilinear motion is periodic and sinusoidal with period  $T = \frac{w}{2\pi}$  (s) and a frequency  $f = \frac{1}{T} = \frac{2\pi}{w}$  (Hz).

$$V = \frac{dx}{dt} = \omega x_0 \cos(\omega t + \varphi_0)$$

$$a = \frac{dV}{dt} = -\omega^2 x_0 \sin(\omega t + \varphi_0) \Rightarrow a = -\omega^2 x$$